


Status of ray trace background

P. Bobik, L. Gombar, K. Kudela,
B. Pastircak, M. Putis


Current status of code

- Class for background calculations: EusoElectronics
- Two main options for Night Glow background:
 - byRate
 - byRadiance (not used in this study)
- byRate – options for shape:
 - Flat – 0.42 pe/(px μ s) for each elementary cell
 - CosTheta – $\cos(\theta)$ dependence of rate, (0.42 pe/(px μ s) refers to theta 0)
 - New switch: RayTraceBG – load value from ray trace simulation for each EC from data file.
(config/Electronics/EusoElectronics/NightGlow_RayTraceBG.dat)
- Configuration for this study:
 - temporal_complutensian_MAR2012_PPP2010_ammend_v1.cfg

Flat

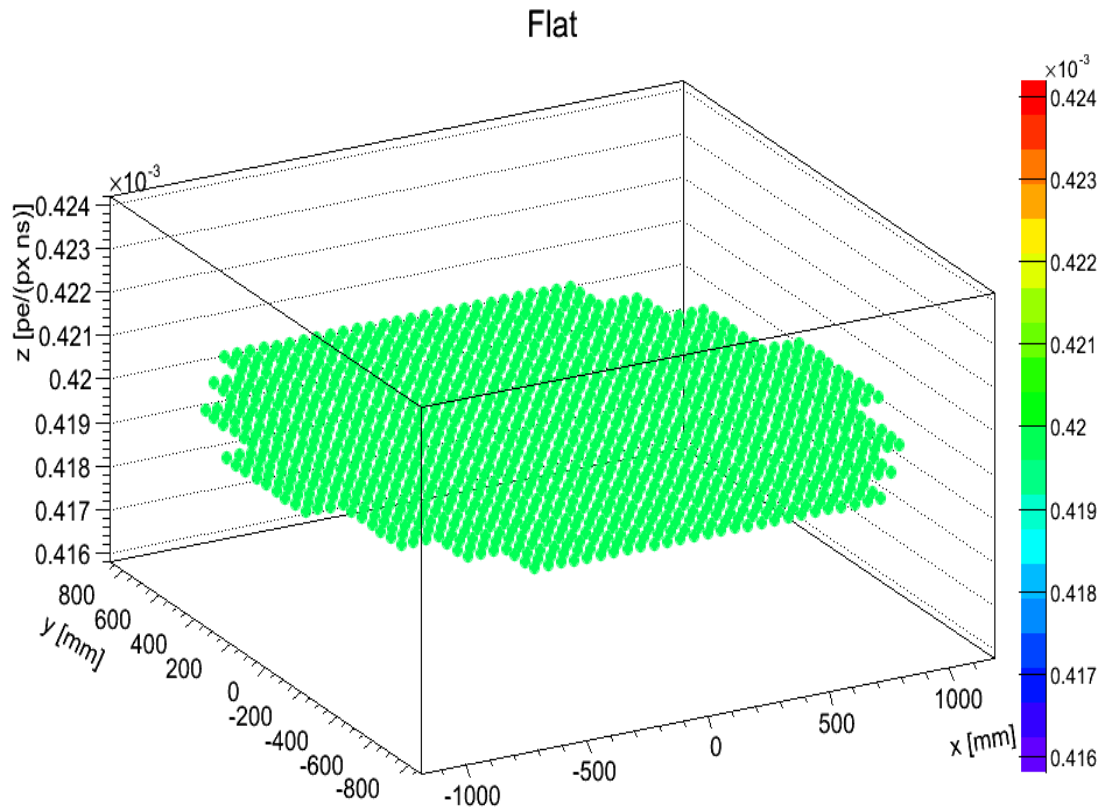


- x, y axis - position of center of EC in mm
- z axis (also color palette) show values of background in pe/(px ns)

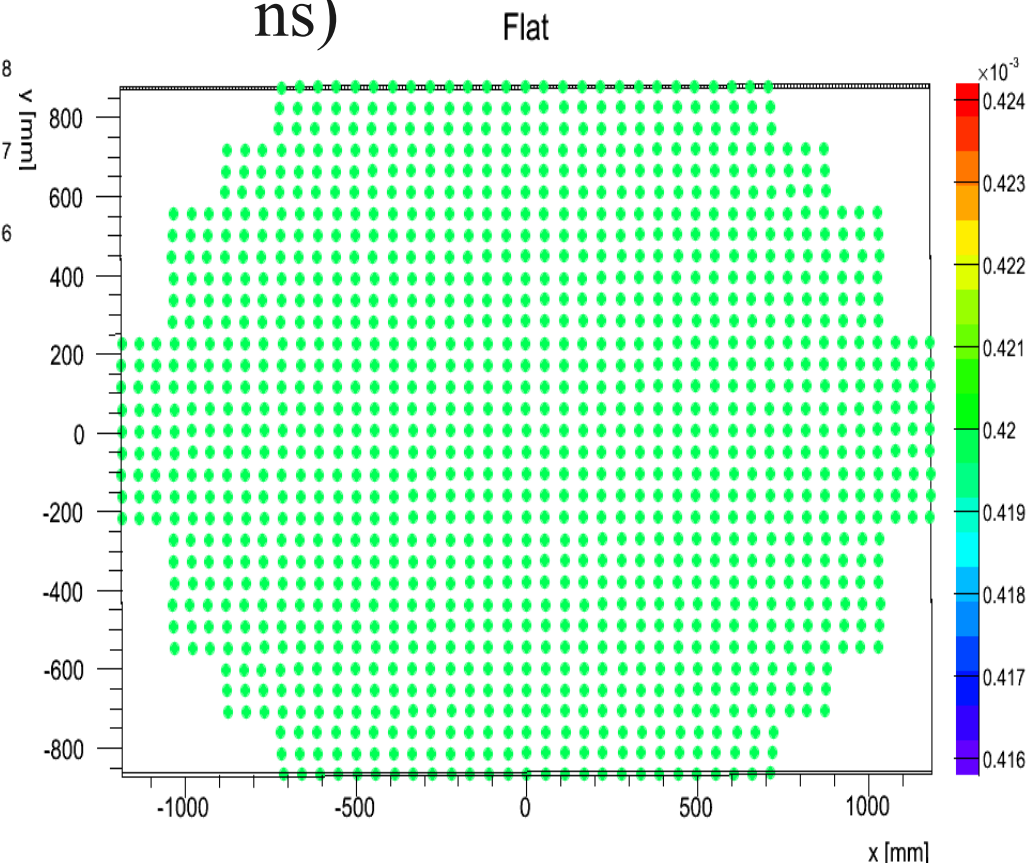


- 0.42 pe/(px μ s) for each elementary cell

CosTheta

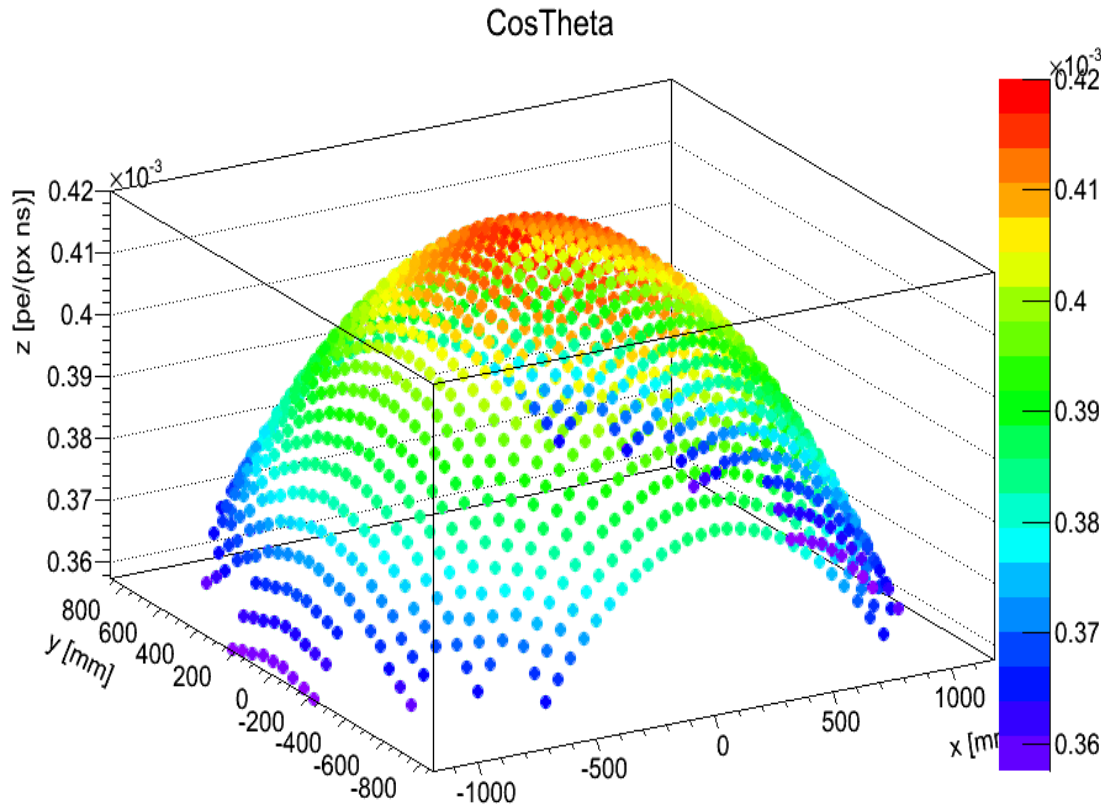


- CosTheta dependence of rate
- $0.42 \text{ pe}/(\text{px } \mu\text{s})$ corresponding to theta 0

- Range of values $\sim 0.36 - 0.42 \text{ pe}/(\text{px } \mu\text{s})$

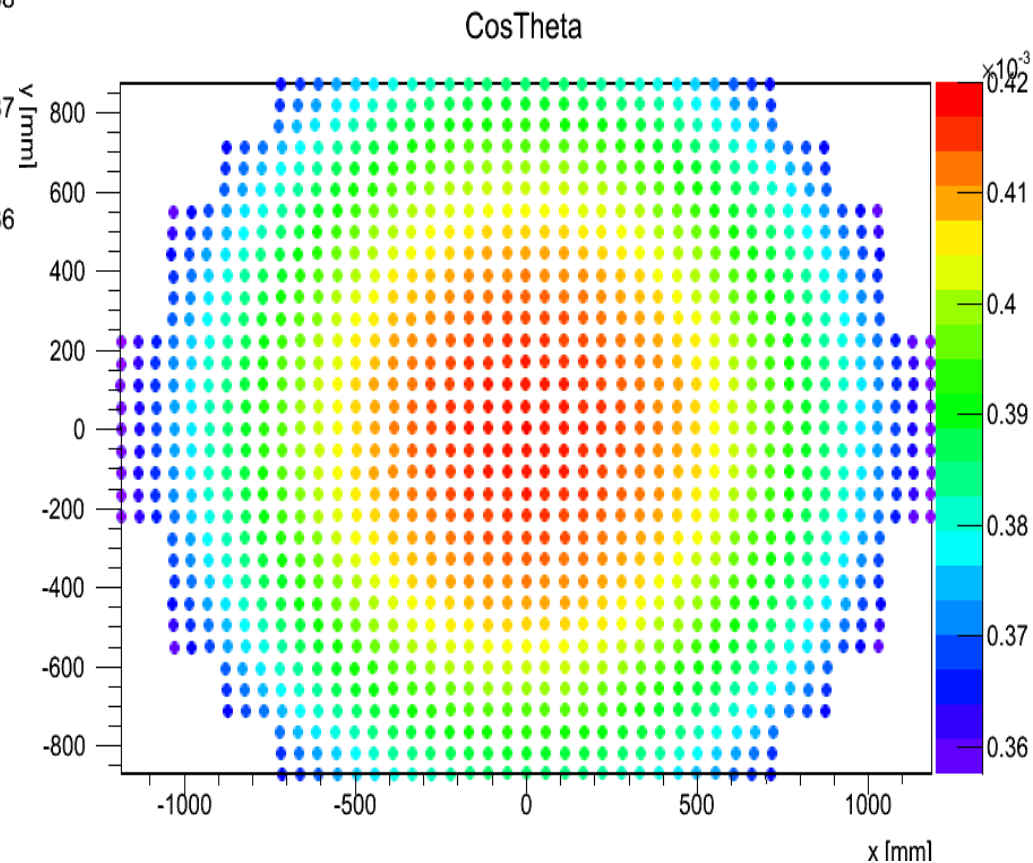

RayTraceBG


RayTraceBG

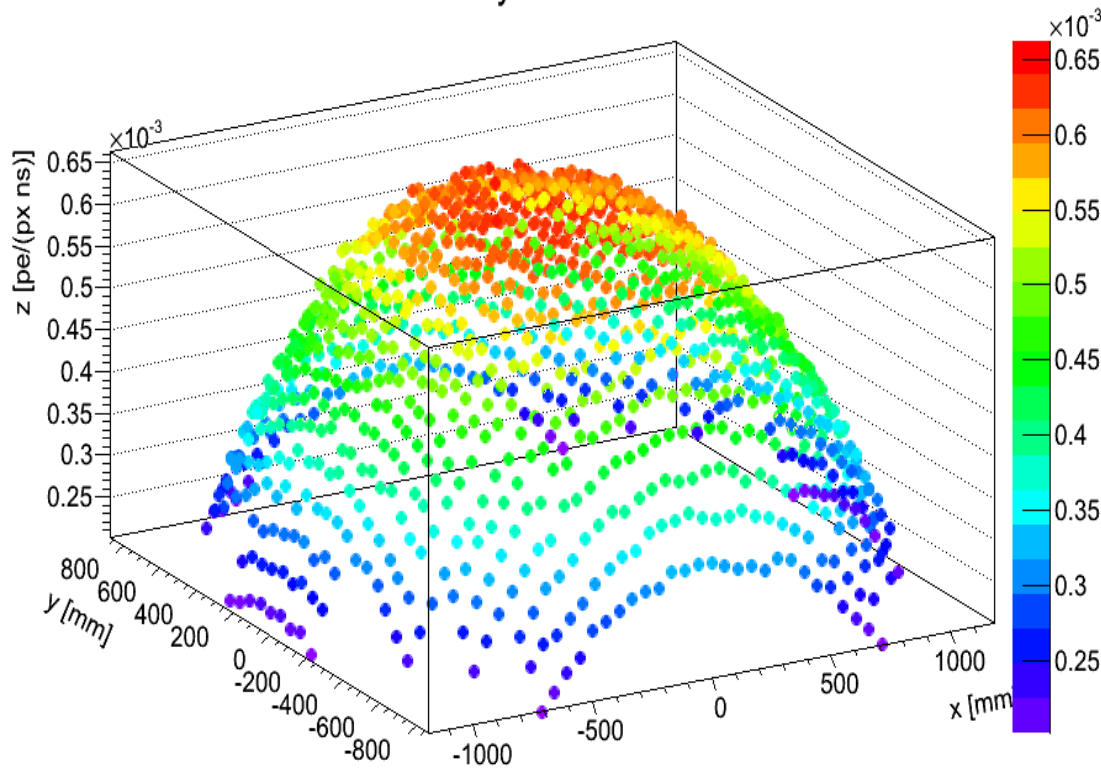


- For more details about ray trace simulations see presentation: P. Bobik JEM-EUSO simulation meeting, Madrid, 26.-30. march 2012

- Range of values $\sim 0.2 - 0.66$ pe/(px μ s)
- Average value: ~ 0.47 pe/(px μ s)


RayTraceBG

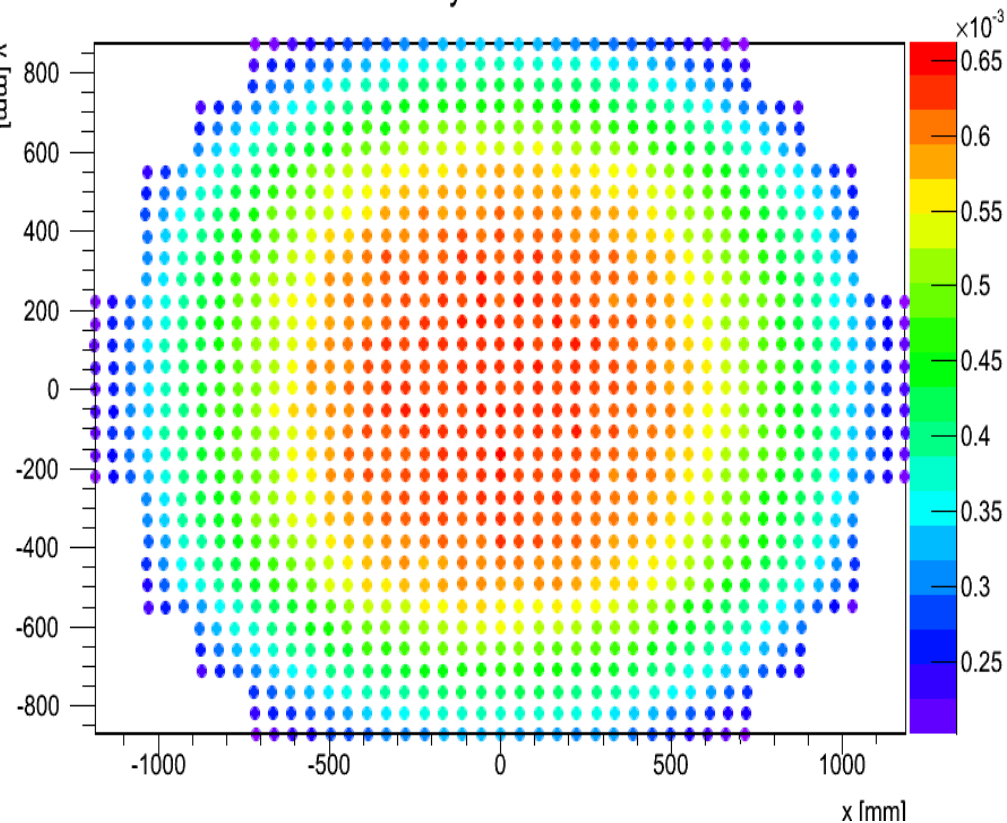

Flat vs CosTheta

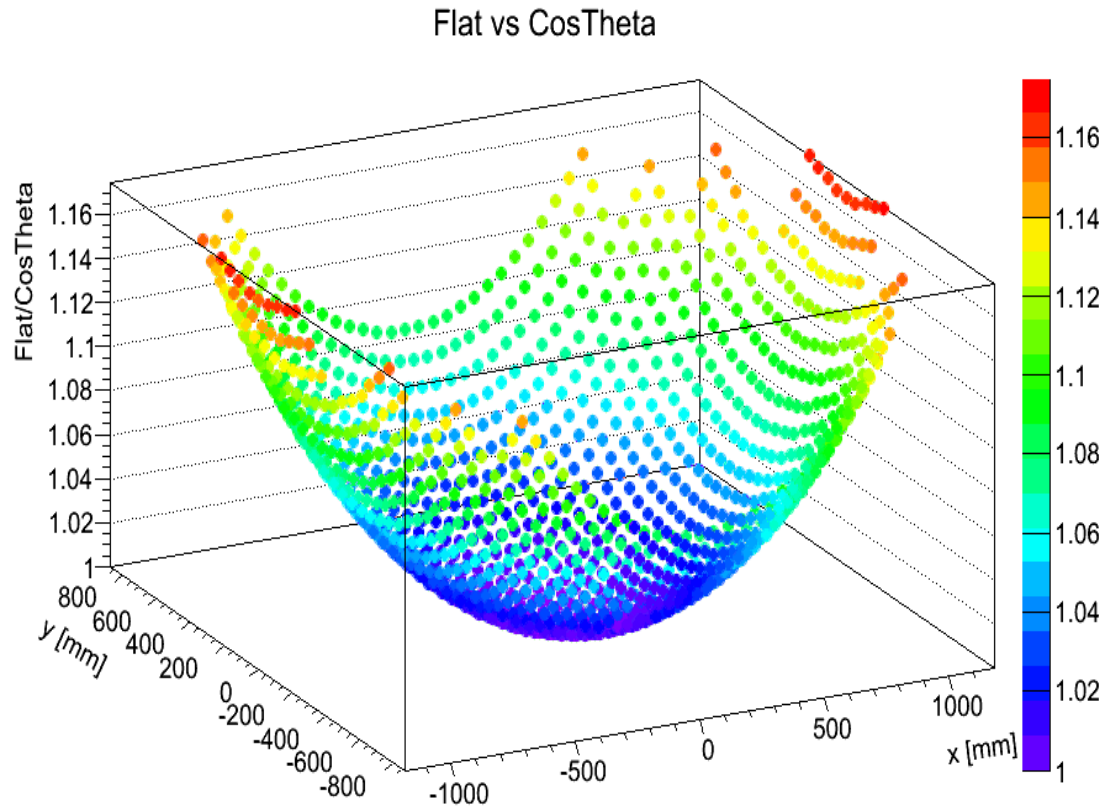


- z axis (also color palette)
Flat/CosTheta

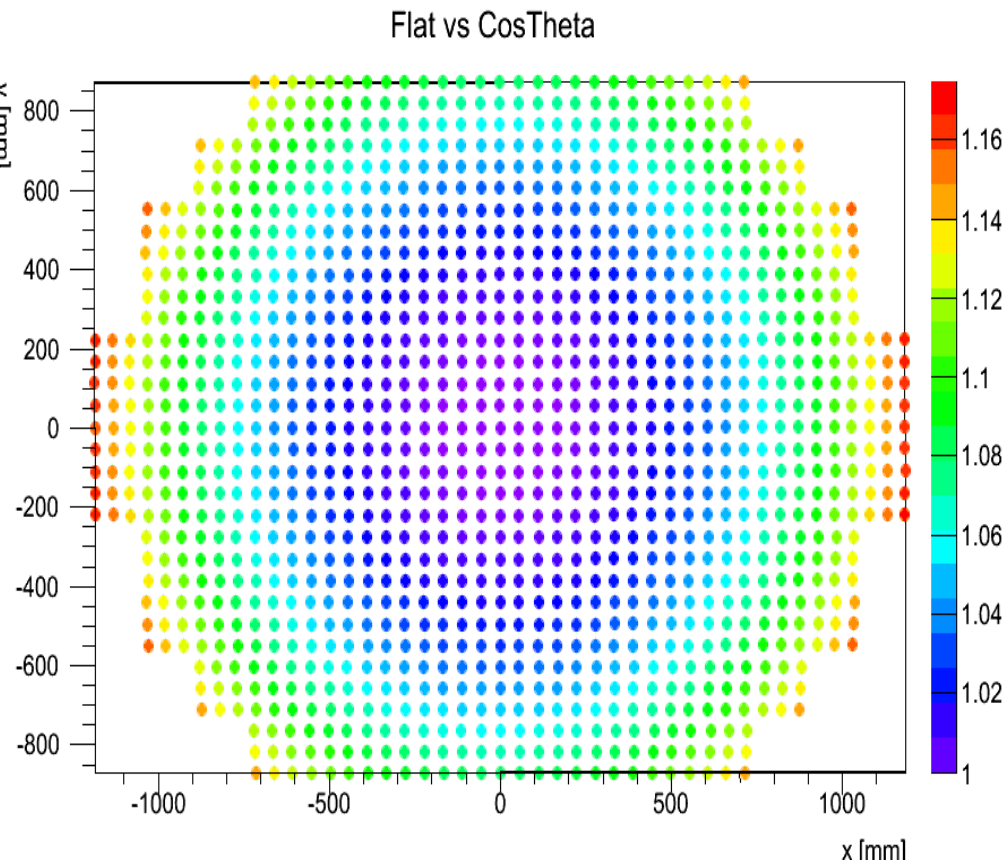

- Ratio:
 - In center ~ 1 for $\theta = 0$
 - On the edge ~ 1.17


Flat vs RayTraceBG

Flat vs RayTraceBG

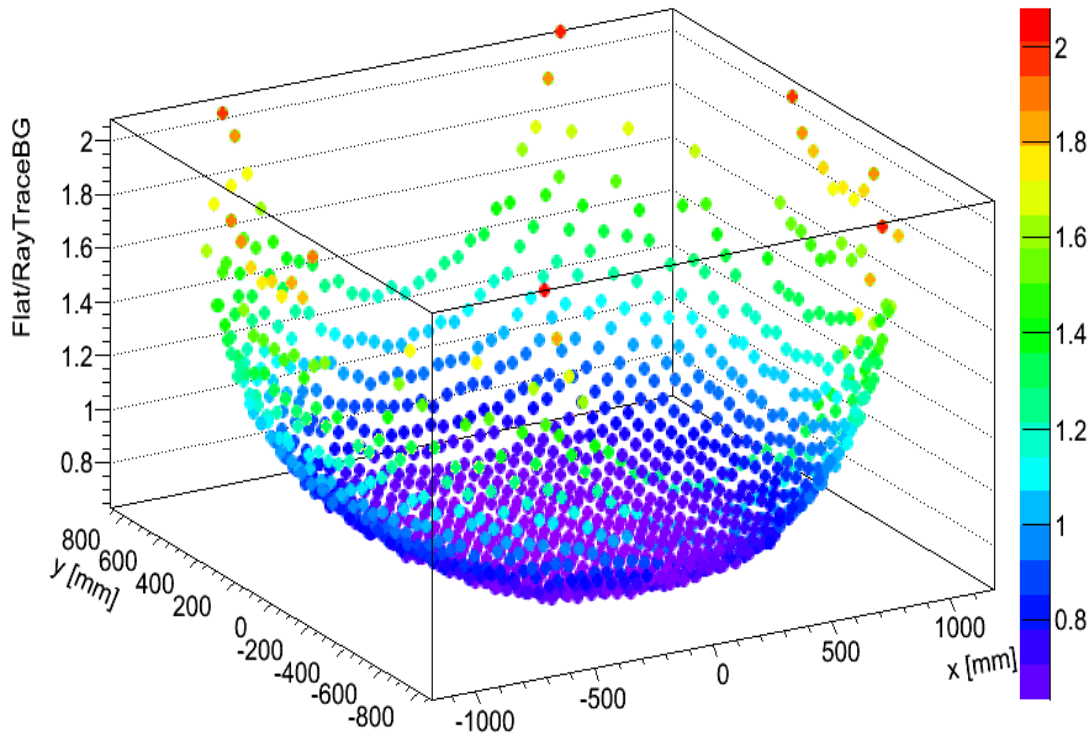

- z axis (also color palette)
Flat/RayTraceBG


Flat vs RayTraceBG

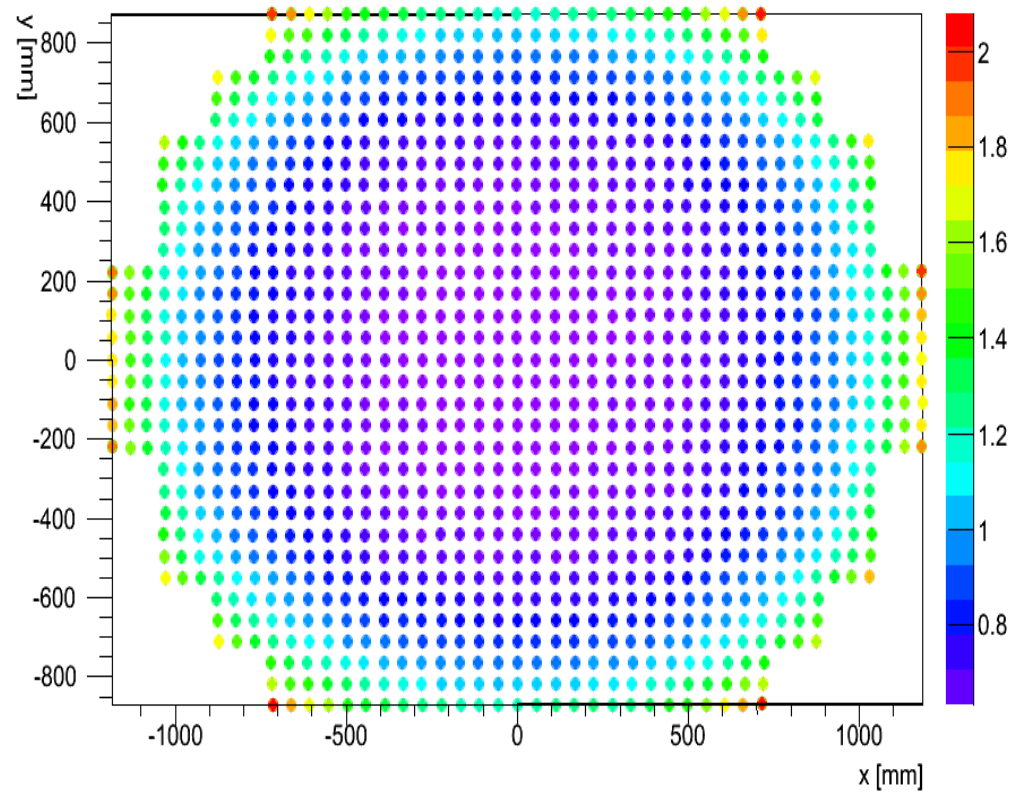

- Ratio:
 - In center ~ 0.65
 - On the edge ~ 2.05 for few EC

CosTheta vs RayTraceBG


CosTheta vs RayTraceBG

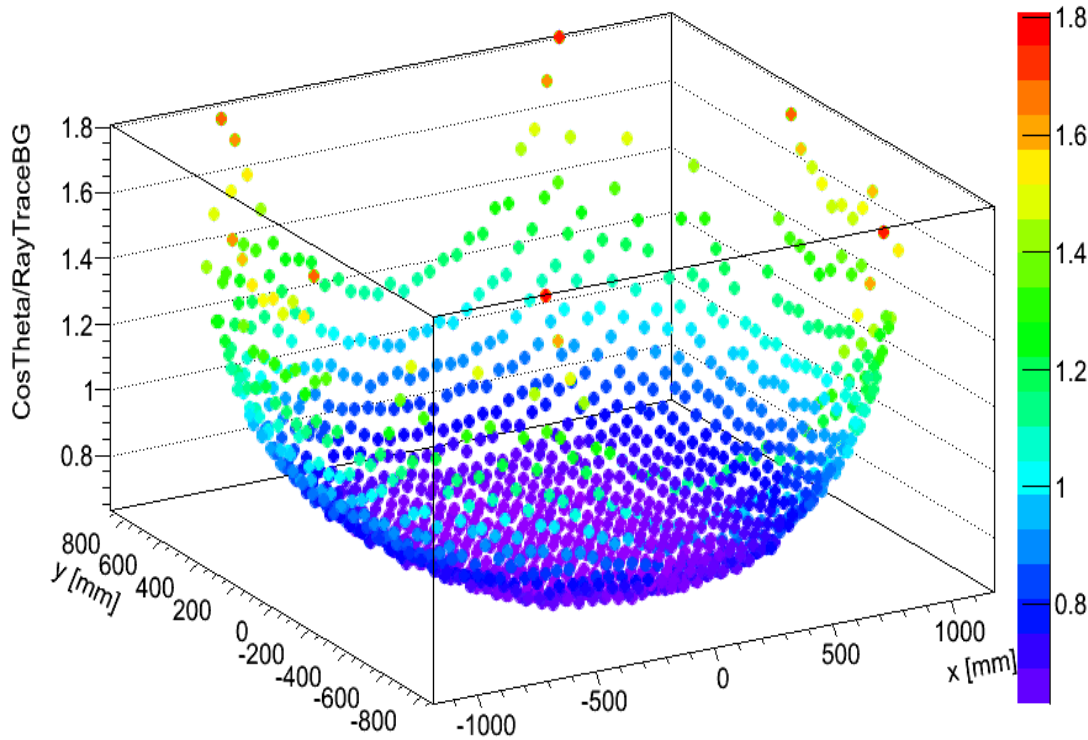

- z axis (also color palette)
CosTheta/RayTraceBG

- Ratio:
 - In center ~ 0.65
 - On the edge ~ 1.8 for few EC

CosTheta vs RayTraceBG

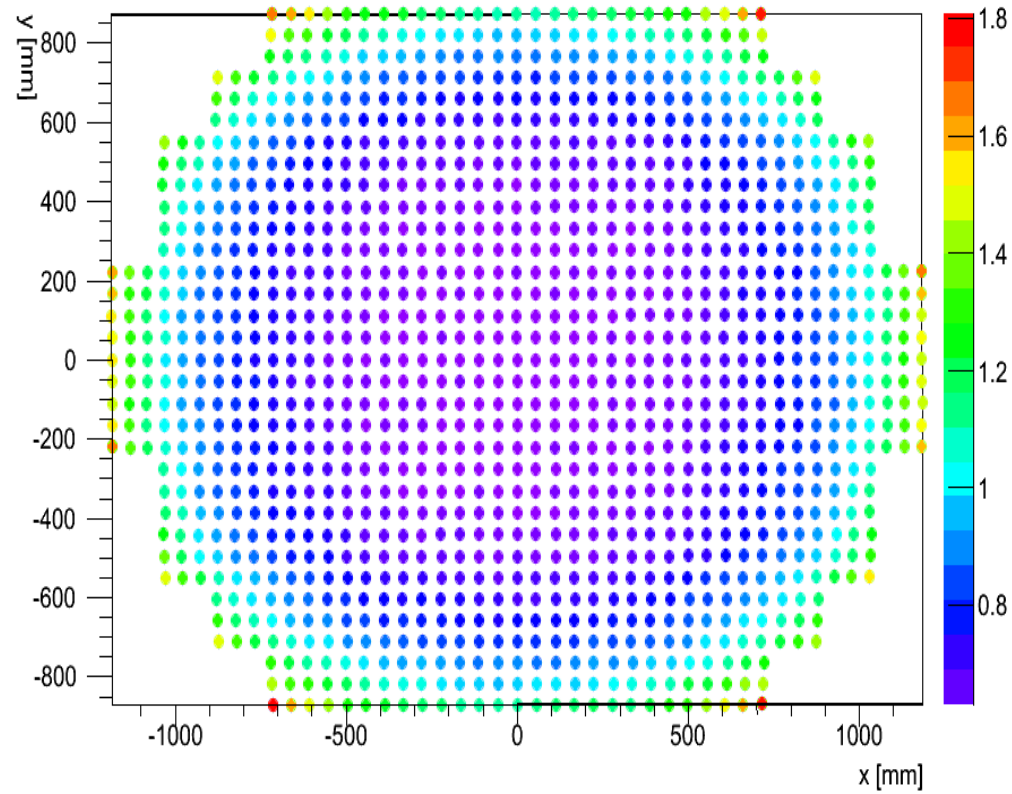


```

#include <iostream>
#include "ERayTraceReader.hh"
#include <fstream> |

using namespace std;
ClassImp(ERayTraceReader)

ERayTraceReader::ERayTraceReader() //constructor
{
    x_mm = new Double_t [1233];
    y_mm = new Double_t [1233];
    value_xy_mm = new Double_t [1233];

    for (Int_t j=0;j<1233;j++){
        x_mm[j]=0;
        y_mm[j]=0;
        value_xy_mm[j]=0;  }

}

ERayTraceReader::~~ERayTraceReader() //destructor
{
    delete [] x_mm;
    delete [] y_mm;
    delete [] value_xy_mm;
}

void ERayTraceReader::LoadFromFile_mm(const Char_t *lnfe)
{
    Int_t i=0;
    Double_t x,y,value=0;

    ifstream myfile1;
    myfile1.open(lnfe); // open file to read data

    while(!myfile1.eof()) {

        myfile1 >>x;
        myfile1 >>y;
        myfile1 >>value;
        x_mm[i]=x;
        y_mm[i]=y;
        value_xy_mm[i]=value;
        i=i+1;
        if (i==1233) break;
    }
    myfile1.close();
}

```

ERayTraceReader.cc

```

#ifndef _ERAYTRACEREADER_H_
#define _ERAYTRACEREADER_H_

#include "TObject.h"

class ERayTraceReader
{
public:

    ERayTraceReader();
    virtual ~ERayTraceReader();
    void LoadFromFile_mm(const Char_t * lnfe);
    virtual Double_t GetX(Int_t j) { return fx=x_mm[j]; }
    virtual Double_t GetY(Int_t j) { return fy=y_mm[j]; }
    virtual Double_t GetValueXY(Int_t j) { return fv=value_xy_mm[j]; }

private:
    Double_t *x_mm;
    Double_t *y_mm;
    Double_t *value_xy_mm;
    Double_t fx;
    Double_t fy;
    Double_t fv;

    ClassDef(ERayTraceReader,1)
};

#endif

```

ERayTraceReader.hh

```

if (fNightGlowShape == "RayTraceBG"){

    fGtu=0;
    string path_RayTraceBG = Conf()->GetCfgDir()+ '/' +
        ClassType()+ '/' +
        ClassName()+ '/' + "NightGlow_" + fNightGlowShape + ".dat";
    const Char_t *path_RayTraceBG_Ch;
    path_RayTraceBG_Ch= path_RayTraceBG.c_str();

    fNightGlowrayTraceBG = new ERayTraceReader();
    fNightGlowrayTraceBG->LoadFromFile_mm(path_RayTraceBG_Ch);
    fGtu= Config::Get()->GetCF("Electronics", "MacroCell")->GetNum("MacroCell.fGtuTimeLength");

}

```

EusoElectronics::Bulid

```
Double_t EusoElectronics::NightGlowRate( const TVector3& pos, const TVector3& norm,  
    Double_t psize, Double_t pde ) const {
```

```
//  
// Nightglow rate as function of the location on the FS  
// (number of hits per microseconds)
```

```
Double_t ngr(0),x(0),y(0),xx(0),yy(0);
```

```
if ( fNightGlow == "byRate" ) {  
    if ( fNightGlowShape == "Flat" )  
        ngr = fNightGlowRateOnAxis;  
    else if ( fNightGlowShape == "CosTheta" ) {  
        Double_t fsPosZ = 2200*mm;  
  
        Double_t tg2th = pos.Perp2();//(pos.x()*pos.x() + pos.y()*pos.y());  
        tg2th /= ( (fsPosZ+pos.z()) * (fsPosZ+pos.z()));  
        Double_t cth = 1. / TMath::Sqrt((1. + tg2th));  
        ngr = fNightGlowRateOnAxis*cth;
```

EusoElectronics::NightGlowRate

```
}else if (fNightGlowShape == "RayTraceBG" ) {  
    x=pos.x();  
    y=pos.y();  
  
    for (Int_t i=0; i<1233;i++){  
        xx=fNightGlowrayTraceBG->GetX(i);  
        yy=fNightGlowrayTraceBG->GetY(i);  
  
        if ( (x<xx+0.1) && (x>xx-0.1) && (y < yy+0.1) && (y>yy-0.1) ) {  
            ngr=(fNightGlowrayTraceBG->GetValueXY(i))*(psize*psize/fGtu); //conversion from pe/(mm2 GTU) on pe/(px ns), GTU is in [ns]  
        }  
    }  
}  
else  
    FatalError("Unknown night glow shape:"+fNightGlowShape);  
} else if ( fNightGlow == "byRadiance" ) {  
    Double_t r = pos.Perp();  
  
    if ( r > fNightGlowDist->GetXmax() ) {  
        ngr = 0;  
    } else {  
        ngr = fNightGlowDist->GetValue( r )*fNightGlowRadiance;  
  
        // apply quantum efficiency and pmt orientation  
        ngr *= psize*psize*Abs(norm.CosTheta());  
        ngr *= pde;  
        ngr *= fDetectorScaleFactor*fDetectorScaleFactor;  
    }  
}  
return ngr;
```

Conclusion

- Ray trace background have more sharp shape than CosTheta background.
- Flat/CosTheta: In center ~ 1 , On the edge ~ 1.17
- Flat/RayTraceBG: In center ~ 0.65 , On the edge ~ 2.05
- CosTheta/RayTraceBG: In center ~ 0.65 , On the edge ~ 1.8
- Need to be recalculated?
 - Range of wavelength for RT BG: 300 – 400 nm
 - Range of wavelength in config. file: 250 – 485 nm
 - What is the final wavelength range?